



BW Type Cable Glands - 4PT Armoured

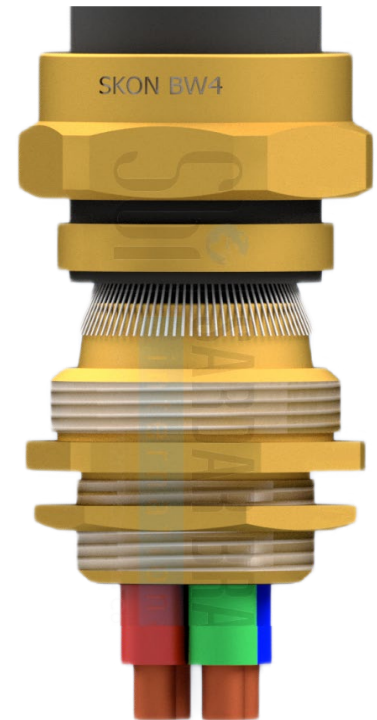

Type	BW 4PT Armoured Cable Gland
Cable Types	SWA (Single Wire Armoured Cables) , AWA
Application	For dry indoor use with SWA cables. Three part armour lock
Optional Thread	Metric,NPT
Gland Material	Brass(CuZn39PB3)
IP Rating	IP30
Operating Temperature	-80C to +600C
Finish	Natural Brass or Nickel Plated or Electroless Nickel Plated
Accessories	PVC Shrouds,Lock Nut,Earth Tag

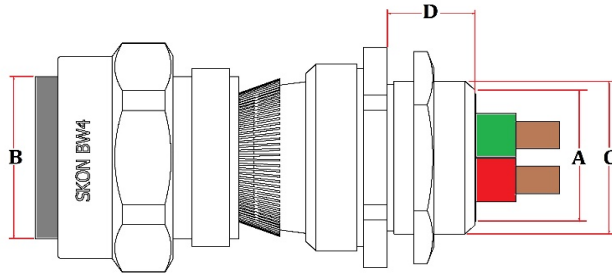

SIZE CHART / SPECIFICATIONS

CODE	GLAND SIZE	THREAD SIZE "C"		THREAD LENGTH "D"	CABLE RANGE	
		METRIC ISO	NPT		A	B
SBI-BW4-20S	20S	M20	1/2"	10	11.50	15.50
SBI-BW4-20L	20L	M20	1/2"	10	14.00	20.50
SBI-BW4-25S	25S	M25	3/4"	10	18.00	24.00
SBI-BW4-25L	25L	M25	3/4"	10	20.00	27.20
SBI-BW4-32	32	M32	1"	15	26.30	33.50
SBI-BW4-40	40	M40	1.1/4"	15	32.00	40.00
SBI-BW4-50S	50S	M50	1.1/2"	15	38.20	46.30
SBI-BW4-50L	50L	M50	1.1/2"	15	44.00	52.60
SBI-BW4-63S	63S	M63	2"	15	50.10	59.00
SBI-BW4-63L	63L	M63	2"	15	56.00	65.30
SBI-BW4-75S	75S	M75	2.1/2"	15	62.00	71.00
SBI-BW4-75L	75L	M75	2.1/2"	15	68.00	78.00
SBI-BW4-90	90	M90	3"	20	80.50	91.00

*All Dimensions are in Millimeters(mm)